



. . . c o n n e c t i n g y o u r b u s i n e s s

LANCOM L-320agn Wireless

Single Radio Access Point for a reliable Wireless LAN coverage

- High Speed Wireless LAN with up to 300 Mbps gross data rate
- Integrated MIMO antenna for a highly discreet Wireless LAN installation
- Gigabit Ethernet slot
- Comfortable hotspot solution via Public Spot Option
- Separation of user groups by Multi-SSID and VLAN
- Available in two different designs: "classic" and "white"

The LANCOM L-320agn Wireless is a 802.11n dual band access point with an integrated MIMO antenna which operates either in the 2.4 or 5-GHz band. As this access point features 802.3af Power over Ethernet, it can even be installed if no wall sockets are available. It is ideally suited for places where external antennas should be avoided to prevent theft, for example in locations such as hospitals, schools or hotels. The LANCOM L-320agn Wireless is available in "classic" and "white" - so that you can choose the design which fits best to your environment.

More performance.

The 802.11n standard includes several mechanisms such as MIMO, 40 MHz channels, packet aggregation, and block acknowledgement which significantly increase the amount of bandwidth available for user applications. With throughput rates up to 300 Mbps, this represents a greater than five-fold increase over the performance of 802.11a/g networks.

Better and reliable coverage.

MIMO technology uses multiple antennas at both the transmitter and receiver to transmit multiple spatial streams. The multiple transmit streams which take different routes in reflecting environments are combined at the receiver using MIMO techniques. The end result is a two-fold increase in throughput and improved wireless coverage due to lesser deadspots.

More security.

LANCOM sets the standards in WLAN security. A comprehensive range of security technologies is supported in wireless LAN including IEEE 802.11i, 802.1X, WPA, WPA2, WEP64/128/152, access control lists or LEPS (LANCOM Enhanced Passphrase Security), which enables the configuration of an optimized solution, whatever the individual requirements. For example, Multi SSID allows the definition of up to 8 user groups, each with its own level of security.

More management.

LANCOM's WLAN management tools offer real benefits to network administrators for the installation, control and monitoring of access points. LANCOM WLAN Controller has built-in support for the L-3xx access point. LANCOM's "Smart Controller" architecture is specifically designed to support high bandwidth applications by providing flexible data plane switching options. As a result higher bandwidth applications can directly offloaded at the access point and reduces the overall cost involved in expensive network upgrades required in centralized architectures. WLANmonitor visualizes the devices connected to WLAN irrespective of physical location and facilitates the central surveillance of the entire wireless network.

More reliability for the future.

From the very start, LANCOM products are designed for a product life of several years. They are equipped with hardware dimensioned for the future. Even reaching back to older product generations, updates to the LANCOM Operating System—LCOS—are available several times a year, free of charge and offering major features. LANCOM offers unbeatable protection of your investment!

WLAN	
Frequency band 2.4 GHz or 5 GHz	2400-2483.5 MHz (ISM) or 5150-5825 MHz (depending on country-specific restrictions)
Integrated Antenna Gain	up to 3 dBi in 2.4 GHz, up to 4.5 dBi in 5 GHz
Data rates 802.11b/g	54 Mbps to IEEE 802.11g (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection) compatible to IEEE 802.11b (11, 5.5, 2, 1 Mbps, Automatic Rate Selection), 802.11 b/g compatibility mode or pure g or pure b
Data rates 802.11a/h	54 Mbps (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection), fully compatible with TPC (adjustable power output) and DFS (automatic channel selection, radar detection) according to EN 301 893
Data rates 802.11n	300 Mbps according to IEEE 802.11n with MCS15 (Fallback to 6,5 Mbps with MCS0)
Range 802.11a/b/g *	Up to 150 m (up to 30 m in buildings) *
Range 802.11n	Up to 250 m @ 6.5 Mbps (up to 20 m @ 300 Mbps indoor)*
Output power at radio module, 2.4 GHz	802.11b: +14dBm @ 1, 2, 5.5 and 11 Mbps 802.11g: +17dBm @ 6 up to 36 Mbps +16dBm @ 48 and 54 Mbps 802.11n: 16dBm @ 6,5/13 Mbps (MCS0/8, 20 MHz) +15 dBm @ 65/130 Mbps (MCS7/15, 20 MHz) +15 dBm @ 15/30 Mbps (MCS0/8, 40 MHz), +14 dBm @ 150/300 Mbps (MCS7/15, 40 MHz)
Output power at radio module, 5 GHz	802.11a/h: +15 dBm @ 6 up to 36 Mbps +14 dBm @ 48 Mbps +12 dBm @ 54 Mbps 802.11n: 15 dBm @ 6,5/13 Mbps (MCS0/8, 20 MHz) +7 up to +10 dBm @ 65/130 Mbps (MCS7/15, 20 MHz) 14 dBm @ 15/30 Mbps (MCS0/8, 40 MHz) +6 up to +9 dBm @ 150/300 Mbps (MCS7/15, 40 MHz)
Minimum transmission power	Transmission power reduction in software in 1 dB steps to min. 0.5 dBm
Receiver sensitivity 2.4 GHz	802.11b: -98 dBm @ 1 Mbps -94 dBm @ 11 Mbps 802.11g: -96 dBm @ 6 Mbps -82 dBm @ 54 Mbps 802.11n: -95 dBm @ 6,5 Mbps (MCS0, 20 MHz) -78 dBm @ 65 Mbps (MCS 7, 20 MHz) -92 dBm @ 15 Mbps (MCS0, 40 MHz) -75 dBm @ 150 Mbps (MCS7, 40 MHz)
Receiver sensitivity 5 GHz	802.11a/h: -98 dBm @ 6 Mbps -81 dBm @ 54 Mbps 802.11n: -94 dBm @ 6,5 Mbps (MCS0, 20 MHz) -76dBm @ 65 Mbps (MCS 7, 20 MHz) -92 dBm @ 15 Mbps (MCS0, 40 MHz), -72 dBm @ 150 Mbps (MCS7, 40 MHz)
Radio channels 2.4 GHz	Up to 13 channels, max. 3 non-overlapping (depending on country-specific restrictions)
Radio channels 5 GHz	Up to 26 non-overlapping channels (available channels and further obligations such as automatic DFS dynamic channel selection depending on national regulations)
Roaming	Seamless handover between radio cells, IAPP support with optional restriction to an ARF context, IEEE 802.11d support
WPA2 fast roaming	Pre-authentication and PMK caching for fast roaming
Concurrent WLAN clients	Up to 30 clients per radio (recommended), 512 clients (max.)
Fast client roaming	With background scanning, moving LANCOM 'client mode' access points pre-authenticate to alternative access points which offer a better signal before Roaming fails
VLAN	VLAN ID definable per interface, WLAN SSID, point-to-point connection and routing context (4094 IDs) IEEE 802.1q
Dynamic VLAN assignment	Dynamic VLAN assignment for target user groups based on MAC addresses, BSSID or SSID by means of external RADIUS server.
Q-in-Q tagging	Support of layered 802.1Q VLANs (double tagging)
Multi-SSID	Simultaneous use of up to 8 independent WLAN networks per WLAN interface
IGMP snooping	Support for Internet Group Management Protocol (IGMP) in the WLAN bridge for WLAN SSIDs and LAN interfaces for specific switching of multicast packets (devices with integrated WLAN only). Automated detection of multicast groups. Configurable action for multicast packets without registration. Configuration of static multicast group members per VLAN ID. Configuration of query simulation for multicast membership per VLAN ID
Security	IEEE 802.11i / WPA2 with passphrase (WPA2-Personal) or 802.1X (WPA2-Enterprise) and hardware-accelerated AES, closed network, WEP64, WEP128, WEP152, user authentication, 802.1x / EAP, LEPS, WPA1/TKIP
EAP Types	EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-AKA Prime, EAP-FAST
RADIUS server	Integrated RADIUS server for MAC address list management
EAP server	Integrated EAP server for authentication of 802.1X clients via EAP-TLS, EAP-TTLS, PEAP, MSCHAP or MSCHAPv2
Quality of Service	Prioritization according to Wireless Multimedia Extensions (WME, subset of IEEE 802.11e)
U-APSD/WMM Power Save	Extension of power saving according to IEEE 802.11e by Unscheduled Automatic Power Save Delivery (equivalent to WMM Power Save). U-APSD supports the automatic switch of clients to a doze mode. Increased battery lifetime for telephone calls over VoWLAN (Voice over WLAN)
Bandwidth limitation	Maximum transmit and receive rates and an individual VLAN ID can be assigned to each WLAN client (MAC address)
Broken link detection	If the link of a chosen LAN interface breaks down, a WLAN module can be deactivated to let the associated clients search for a new base station
Background scanning	Detection of rogue AP's and the channel information for all WLAN channels during normal AP operation. The Background Scan Time Interval defines the time slots in which an AP or Router searches for a foreign WLAN network in its vicinity. The time interval can be specified in either milliseconds, seconds, minutes, hours or days
Client detection	Rogue WLAN client detection based on probe requests

WLAN	
802.1X supplicant	Authentication of an access point in WLAN client mode at another access point via 802.1X (EAP-TLS, EAP-TTLS and PEAP)
Layer-3 Tunneling	Layer-3 Tunneling in conformity with the CAPWAP standard allows the bridging of WLANs per SSID to a separate IP subnet. Layer-2 packets are encapsulated in Layer-3 tunnels and transported to a LANCOM WLAN controller. By doing this the access point is independent of the present infrastructure of the network. Possible applications are roaming without changing the IP address and compounding SSIDs without using VLANs.
IEEE 802.11u	The WLAN standard IEEE 802.11u (Hotspot 2.0) allows for a seamless transition from the cellular network into WLAN hotspots. Authentication methods using SIM card information, certificates or username and password, enable an automatic, encrypted login to WLAN hotspots - without the need to manually enter login credentials.
*) Note	The effective distances and transmission rates that can be achieved are depending of the site RF conditions
LANCOM Spectral Scan	
RF spectrum scan	Up to 13 channels (2.4 GHz) or up to 26 channels (5 GHz) (depending on national regulations and manual configuration)
Signal strength of WLAN channels	Illustration of signal strength on individual WLAN channels at a certain point of time
IEEE 802.11n Features	
MIMO	MIMO technology is a technique which uses multiple transmitters to deliver multiple data streams via different spatial channels. Depending on the existing RF conditions the throughput is multiplied with MIMO technology.
40 MHz Channels	Two adjacent 20 MHz channels are combined to create a single 40 MHz channel. Depending on the existing RF Conditions channel bonding doubles the throughput.
20/40MHz Coexistence Mechanisms in the 2.4GHz Band	Support of coexisting accesspoints with 20 and 40MHz channels in 2.4GHz band.
MAC Aggregation and Block Acknowledgement	MAC Aggregation increase the 802.11 MAC efficiency by combining MAC data frames and sending it out with a single header. The receiver acknowledges the combined MAC frame with a Block Acknowledgement. Depending on existing RF conditions, this technique improves throughput by up to 20%.
Maximal Ratio Combining (MRC)	Maximal Ratio Combining (MRC) enables the receiver (access point), in combination with multiple antennas, to optimally combine MIMO signals to improve the client reception at long-range.
Short Guard Interval	The guard interval is the time between OFDM symbols in the air. 802.11n gives the option for a shorter 400 nsec guard interval compared to the legacy 800 nsec guard interval. Under ideal RF conditions this increases the throughput by upto 10%
WLAN operating modes	
WLAN access point	Infrastructure mode (autonomous operation or managed by LANCOM WLAN Controller)
WLAN bridge	Point-to-multipoint connection of up to 16 Ethernet LANs (mixed operation optional), broken link detection, blind mode, supports VLAN When configuring Pt-to-Pt links, pre-configured names can be used as an alternative to MAC Addresses for creating a link. Rapid spanning-tree protocol to support redundant routes in Ethernet networks
WLAN router	Use of the LAN connector for simultaneous DSL over LAN, IP router, NAT/Reverse NAT (IP masquerading) DHCP server, DHCP client, DHCP relay server, DNS server, PPPoE client (incl. Multi-PPPoE), PPTP client and server, NetBIOS proxy, DynDNS client, NTP, port mapping, policy-based routing based on routing tags, tagging based on firewall rules, dynamic routing with RIPv2, VRRP
WLAN client	Transparent WLAN client mode for wireless Ethernet extensions, e.g. connecting PCs or printers by Ethernet; up to 64 MAC addresses. Automatic selection of a WLAN profile (max. 8) with individual access parameters depending on signal strength or priority
Spectral Scan	By scanning the RF spectrum, interferences are identified and graphically illustrated.
Firewall	
Stateful inspection firewall	Incoming/Outgoing Traffic inspection based on connection information. Trigger for firewall rules depending on backup status, e.g. simplified rule sets for low-bandwidth backup lines. Limitation of the number of sessions per remote site (ID)
Packet filter	Check based on the header information of an IP packet (IP or MAC source/destination addresses; source/destination ports, DiffServ attribute); remote-site dependant, direction dependant, bandwidth dependant
Extended port forwarding	Network Address Translation (NAT) based on protocol and WAN address, i.e. to make internal webserver accessible from WAN
N:N IP address mapping	N:N IP address mapping for translation of IP addresses or entire networks
Tagging	The firewall marks packets with routing tags, e.g. for policy-based routing; Source routing tags for the creation of independent firewall rules for different ARF contexts
Actions	Forward, drop, reject, block sender address, close destination port, disconnect
Notification	Via e-mail, SYSLOG or SNMP trap
Quality of Service	
Traffic shaping	Dynamic bandwidth management with IP traffic shaping

Quality of Service	
Bandwidth reservation	Dynamic reservation of minimum and maximum bandwidths, totally or connection based, separate settings for send and receive directions. Setting relative bandwidth limits for QoS in percent
DiffServ/TOS	Priority queuing of packets based on DiffServ/TOS fields
Packet-size control	Automatic packet-size control by fragmentation or Path Maximum Transmission Unit (PMTU) adjustment
Layer 2/Layer 3 tagging	Automatic or fixed translation of layer-2 priority information (IEEE 802.11p-marked Ethernet frames) to layer-3 DiffServ attributes in routing mode. Translation from layer 3 to layer 2 with automatic recognition of 802.11p-support in the destination device
Security	
Intrusion Prevention	Monitoring and blocking of login attempts and port scans
IP spoofing	Source IP address check on all interfaces: only IP addresses belonging to the defined IP networks are allowed
Access control lists	Filtering of IP or MAC addresses and preset protocols for configuration access
Denial of Service protection	Protection from fragmentation errors and SYN flooding
General	Detailed settings for handling reassembly, PING, stealth mode and AUTH port
URL blocker	Filtering of unwanted URLs based on DNS hitlists and wildcard filters
Password protection	Password-protected configuration access can be set for each interface
Alerts	Alerts via e-mail, SNMP-Traps and SYSLOG
Authentication mechanisms	EAP-TLS, EAP-TTLS, PEAP, MS-CHAP, MS-CHAPv2 as EAP authentication mechanisms, PAP, CHAP, MS-CHAP and MS-CHAPv2 as PPP authentication mechanisms
WLAN protocol filters	Limitation of the allowed transfer protocols, source and target addresses on the WLAN interface
Adjustable reset button	Adjustable reset button for 'ignore', 'boot-only' and 'reset-or-boot'
IP redirect	Fixed redirection of any packet received over the WLAN interface to a dedicated target address
High availability / redundancy	
VRRP	VRRP (Virtual Router Redundancy Protocol) for backup in case of failure of a device or remote station. Enables passive standby groups or reciprocal backup between multiple active devices including load balancing and user definable backup priorities
FirmSafe	For completely safe software upgrades thanks to two stored firmware versions, incl. test mode for firmware updates
Analog/GSM modem backup	Optional operation of an analog or GSM modem at the serial interface
Line monitoring	Line monitoring with LCP echo monitoring, up to 4 addresses for end-to-end monitoring with ICMP polling
Routing functions	
Router	IP and NetBIOS/IP multi-protocol router
Advanced Routing and Forwarding	Separate processing of 16 contexts due to virtualization of the routers. Mapping to VLANs and complete independent management and configuration of IP networks in the device, i.e. individual settings for DHCP, DNS, Firewalling, QoS, VLAN, Routing etc. Automatic learning of routing tags for ARF contexts from the routing table
HTTP	HTTP and HTTPS server for configuration by web interface
DNS	DNS client, DNS server, DNS relay, DNS proxy and dynamic DNS client
DHCP	DHCP client, DHCP relay and DHCP server with autodetection. Cluster of several LANCOM DHCP servers per context (ARF network) enables caching of all DNS assignments at each router. DHCP forwarding to multiple (redundant) DHCP servers
NetBIOS	NetBIOS/IP proxy
NTP	NTP client and SNTP server, automatic adjustment for daylight-saving time
Policy-based routing	Policy-based routing based on routing tags. Based on firewall rules, certain data types are marked for specific routing, e.g. to particular remote sites or lines
Dynamic routing	Dynamic routing with RIPv2. Learning and propagating routes; separate settings for LAN and WAN. Extended RIPv2 including HopCount, Poisoned Reverse, Triggered Update for LAN (acc. to RFC 2453) and WAN (acc. to RFC 2091) as well as filter options for propagation of routes. Definition of RIP sources with wildcards
DHCPv6	DHCPv6 client, DHCPv6 server, DHCPv6 relay, stateless- and stateful mode, IPv6 address (IA_NA), prefix delegation (IA_PD), DHCPv6 reconfigure (server and client)
Layer 2 functions	
ARP lookup	Packets sent in response to LCOS service requests (e.g. for Telnet, SSH, SNMP, SMTP, HTTP(S), SNMP, etc.) via Ethernet can be routed directly to the requesting station (default) or to a target determined by ARP lookup

Layer 2 functions	
LLDP	Automatic discovery of network topology in layer 2 networks (Link Layer Discover Protocol).
COM port server	
COM port forwarding	COM-port server for the DIN interface. For a serial device connected to it, the server manages its own virtual COM port via Telnet (RFC 2217) for remote maintenance (works with popular virtual COM-port drivers compliant with RFC 2217). Switchable newline conversion and alternative binary mode. TCP keepalive according to RFC 1122 with configurable keepalive interval, retransmission timeout and retries
LAN protocols	
IP	ARP, proxy ARP, BOOTP, DHCP, DNS, HTTP, HTTPS, IP, ICMP, NTP/SNTP, NetBIOS, PPPoE (server), RADIUS, RIP-1, RIP-2, RTP, SIP, SNMP, TCP, TFTP, UDP, VRRP, VLAN
Rapid Spanning Tree	802.1d Spanning Tree and 802.1w Rapid Spanning Tree support for dynamic path selection with redundant layer 2 connections
IPv6	NDP, stateless address autoconfiguration (SLAAC), stateful address autoconfiguration (with DHCPv6), router advertisements, ICMPv6, DHCPv6, DNS, HTTP, HTTPS, PPPoE, TCP, UDP
IPv6	
Dual Stack	IPv4/IPv6 dual stack
IPv6 compatible LCOS applications	WEBconfig, HTTP, HTTPS, SSH, Telnet, DNS, TFTP, Firewall
WAN protocols	
Ethernet	PPPoE, Multi-PPPoE, ML-PPP, PPTP (PAC or PNS) and IPoE (with or without DHCP), RIP-1, RIP-2, VLAN, IP
IPv6	IPv6 over PPP (IPv6 and IPv4/IPv6 dual stack session), IPoE (autoconfiguration, DHCPv6 or static)
Tunneling protocols (IPv4/IPv6)	6to4, 6in4, 6rd (static and via DHCP)
WAN operating mode	
xDSL (ext. modem)	ADSL1, ADSL2 or ADSL2+ with external ADSL2+ modem
Interfaces	
LAN	10/100/1000 Base-TX, autosensing, auto node hub, PoE compliant with IEEE 802.3af
DSL over LAN (DSLol)	The LAN port can (even parallel to LAN mode) be used as a WAN port for connecting external DSL modems (PPPoE) or external routers.
Serial interface	Serial configuration interface / COM port (8 pin Mini-DIN): 9,600 - 115,000 baud, suitable for optional connection of analog/GPRS modems. Supports internal COM port server and allows for transparent asynchronous transmission of serial data via TCP
Internal antenna	Radio module uses two internal antennas.
LCMS (LANCOM Management System)	
LANconfig	Configuration program for Microsoft Windows, incl. convenient Setup Wizards. Optional group configuration, simultaneous remote configuration and management of multiple devices over IP connection (HTTPS, HTTP, TFTP). A tree view of the setting pages like in WEBconfig provides quick access to all settings in the configuration window. Password fields which optionally display the password in plain text and can generate complex passwords. Configuration program properties per project or user. Automatic storage of the current configuration before firmware updates. Exchange of configuration files between similar devices, e.g. for migrating existing configurations to new LANCOM products. Detection and display of the LANCOM managed switches. Extensive application help for LANconfig and parameter help for device configuration. LANCOM QuickFinder as search filter within LANconfig and device configurations that reduces the view to devices with matching properties
LANmonitor	Monitoring application for Microsoft Windows for (remote) surveillance and logging of the status of LANCOM devices and connections, incl. PING diagnosis and TRACE with filters and save to file. Search function within TRACE tasks. Wizards for standard diagnostics. Export of diagnostic files for support purposes (including bootlog, sysinfo and device configuration without passwords). Graphic display of key values (marked with an icon in LANmonitor view) over time as well as table for minimum, maximum and average in a separate window, e. g. for Rx, Tx, CPU load, free memory. Monitoring of the LANCOM managed switches. Flick easily through different search results by LANCOM QuickFinder
WLANmonitor	Monitoring application for Microsoft Windows for the visualization and monitoring of LANCOM WLAN installations, incl. Rogue AP and Rogue Client visualization. LANCOM QuickFinder as search filter that reduces the view to devices with matching properties
Firewall GUI	Graphical user interface for configuring the object-oriented firewall in LANconfig: Tabular presentation with symbols for rapid understanding of objects, choice of symbols for objects, objects for actions/Quality of Service/remote sites/services, default objects for common scenarios, individual object definition (e.g. for user groups)
Automatic software update	Voluntary automatic updates for LCMS. Search online for LCOS updates for devices managed by LANconfig on the myLANCOM download server (myLANCOM account mandatory). Updates can be applied directly after the download or at a later time
Management	
WEBconfig	Integrated web server for the configuration of LANCOM devices via Internet browsers with HTTPS or HTTP. Similar to LANconfig with a system overview, syslog and events display, symbols in the menu tree, quick access with side tabs. WEBconfig also features Wizards for basic configuration, security, Internet access, LAN-LAN coupling. Online help for parameters in LCOS menu tree

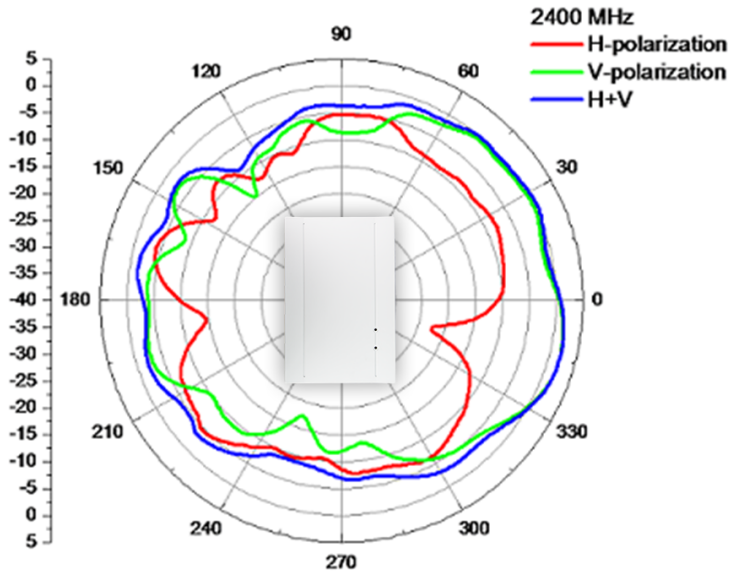
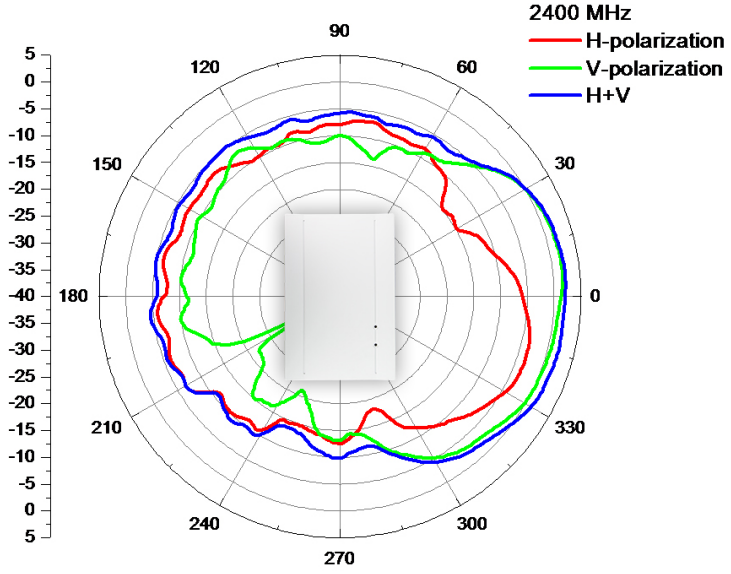
Management	
LANCOM Layer 2 Management (emergency management)	The LANCOM Layer 2 Management protocol (LL2M) enables an encrypted access between the command line interfaces of two LANCOM device directly via a Layer 2 connection
Alternative boot configuration	During rollout devices can be preset with project- or customer-specific settings. Up to two boot- and reset-persistent memory spaces can store customized configurations for customer-specific standard settings (memory space '1') or as a rollout configuration (memory space '2'). A further option is the storage of a persistent standard certificate for the authentication of connections during rollouts
Device Syslog	Syslog buffer in the RAM (size depending on device memory) to store events for diagnosis. Default set of rules for the event protocol in Syslog. The rules can be modified by the administrator. Display and saving of internal Syslog buffer (events) from LANCOM devices with LANmonitor, display only with WEBconfig
Access rights	Individual access and function rights for up to 16 administrators. Alternative access control on a per parameter basis with TACACS+
User administration	RADIUS user administration for dial-in access (PPP/PPTP). Support for RADSEC (Secure RADIUS) providing secure communication with RADIUS servers
Remote maintenance	Remote configuration with Telnet/SSL, SSH (with password or public key), browser (HTTP/HTTPS), TFTP or SNMP, firmware upload via HTTP/HTTPS or TFTP
TACACS+	Support of TACACS+ protocol for authentication, authorization and accounting (AAA) with reliable connections and encrypted payload. Authentication and authorization are separated completely. LANCOM access rights are converted to TACACS+ levels. With TACACS+ access can be granted per parameter, path, command or functionality for LANconfig, WEBconfig or Telnet/SSH. Each access and all changes of configuration are logged. Access verification and logging of SNMP Get and Set requests. WEBconfig supports the access rights of TACACS+ and choice of TACACS+ server at login. LANconfig provides a device login with the TACACS+ request conveyed by the addressed device. Authorization to execute scripts and each command within them by checking the TACACS+ server's database. CRON, action-table and script processing can be diverted to avoid TACACS+ to relieve TACACS+ servers. Redundancy by setting several alternative TACACS+ servers. Configurable option to fall back to local user accounts in case of connection drops to the TACACS+ servers. Compatibility mode to support several free TACACS+ implementations
Remote maintenance of 3rd party devices	A remote configuration for devices behind der LANCOM can be accomplished (after authentication) via tunneling of arbitrary TCP-based protocols, e.g. for HTTP(S) remote maintenance of VoIP phones or printers of the LAN. Additionally, SSH and Telnet client allow to access other devices from a LANCOM device with an interface to the target subnet if the LANCOM device can be reached at its command line interface
TFTP & HTTP(S) client	For downloading firmware and configuration files from a TFTP, HTTP or HTTPS server with variable file names (wildcards for name, MAC/IP address, serial number), e.g. for roll-out management. Commands for live Telnet session, scripts or CRON jobs. HTTPS Client authentication possible by username and password or by certificate
SSH & Telnet client	SSH-client function compatible to Open SSH under Linux and Unix operating systems for accessing third-party components from a LANCOM router. Also usable when working with SSH to login to the LANCOM device. Support for certificate- and password-based authentication. Generates its own key with sshkeygen. SSH client functions are restricted to administrators with appropriate rights. Telnet client function to login/administer third party devices or other LANCOM devices from command line interface
HTTPS Server	Option to choose if an uploaded certificate or the default certificate is used by the HTTPS server
Security	Access rights (read/write) over WAN or (W)LAN can be set up separately (Telnet/SSL, SSH, SNMP, HTTPS/HTTP), access control list
Scripting	Scripting function for batch-programming of all command-line parameters and for transferring (partial) configurations, irrespective of software versions and device types, incl. test mode for parameter changes. Utilization of timed control (CRON) or connection establishment and termination to run scripts for automation. Scripts can send e-mails with various command line outputs as attachments
Load commands	LoadFirmware, LoadConfig and LoadScript can be executed conditionally in case certain requirements are met. For example, the command LoadFirmware could be executed on a daily basis and check each time if the current firmware is up to date or if a new version is available. In addition, LoadFile allows the upload of files including certificates and secured PKCS#12 containers
SNMP	SNMP management via SNMPv2, new unified private MIB for all most current and future LANCOM devices with LCOS. Download link in WEBconfig
Timed control	Scheduled control of parameters and actions with CRON service
Diagnosis	Extensive LOG and TRACE options, PING and TRACEROUTE for checking connections, LANmonitor status display, internal logging buffer for SYSLOG and firewall events
LANCOM WLAN Controller	Supported by all LANCOM WLAN Controller (separate optional hardware equipment for installation, optimization, operating and monitoring of WLAN networks, except for P2P connections)
Statistics	
Statistics	Extensive Ethernet, IP and DNS statistics; SYSLOG error counter
Accounting	Connection time, online time, transfer volumes per station. Snapshot function for regular read-out of values at the end of a billing period. Timed (CRON) command to reset all counters at once
Export	Accounting information exportable via LANmonitor and SYSLOG
Hardware	
Power supply	12 V DC, external power adapter (230 V) with bayonet cap to protect against accidentally unplugging
Power supply	Via Power over Ethernet, compliant with IEEE 802.3af

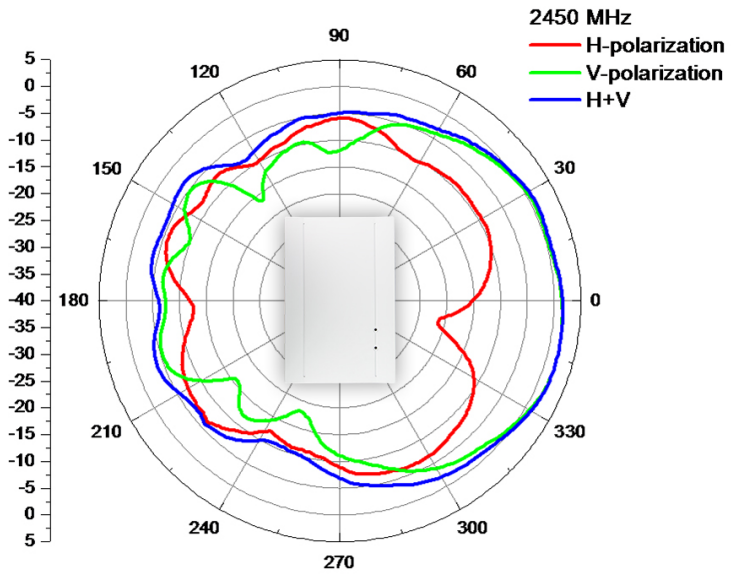
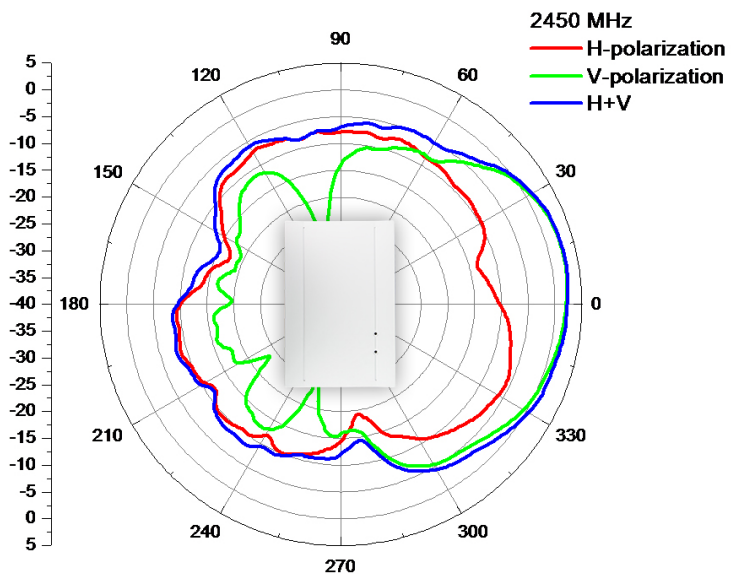
LANCOM L-320agn Wireless

Features as of: LCOS 8.82 (> REL. D)

Hardware	
Environment	Temperature range 0–45° C; humidity 0–95%; non-condensing
Housing	Robust synthetic housing, rear connectors, ready for wall mounting, Kensington lock; 210 x 45 x 140 mm (W x H x D)
Power consumption (max)	approx. 7.25 Watts with 12 V/ 1 A power supply adapter (total power consumption of access point and power supply adapter), approx. 9.85 Watts via PoE
Declarations of conformity*	
CE	EN 60950-1, EN 301 489-1, EN 301 489-17
Wi-Fi Alliance Certification	802.11a/b/g/n Wi-Fi Certified
2.4 GHz WLAN	EN 300 328
5 GHz WLAN	EN 301 893
Medical	Medical conformity with EN 60601-1-2
Notifications	Certifications notified in Germany, Belgium, Netherlands, Luxembourg, Austria, Switzerland, UK, Italy, Spain, France, Portugal, Czech Republic, Denmark
IPv6	IPv6 Ready Gold
*) Note	You will find all declarations of conformity in the products section of our website at www.lancom-systems.eu
Scope of delivery	
Manual	Installation Guide (DE/EN/FR/ES/IT/PT/NL)
CD/DVD	Data medium with management software (LANconfig, LANmonitor, WLANmonitor, LANCAPI) and documentation
Cable	1 Ethernet cable, 3 m
Power supply unit	External power adapter (230 V), NEST 12 V/1.5 A DC/S, coaxial power connector 2.1/5.5 mm bayonet, temperature range from -5 to +45° C, LANCOM item no. 110723 (EU)/LANCOM item no 110829 (UK)
Power supply unit	External power adapter (230 V), NEST 12 V/1.5 A DC/S, coaxial power connector 2.1/5.5 mm bayonet, temperature range from -5 to +45° C, LANCOM item no. 110723 (EU)/LANCOM item no 110829 (UK) (not included in bulk delivery)
Support	
Warranty	3 years Support via Hotline and Internet KnowledgeBase
Software updates	Regular free updates (LCOS operating system and LANCOM Management System) via Internet
Options	
Advance Replacement	LANCOM Next Business Day Service Extension CPE, item no. 61411
Warranty Extension	LANCOM 2-Year Warranty Extension CPE, item no. 61414
Public Spot	LANCOM Public Spot Option (authentication and accounting software for hotspots, incl. Voucher printing through Standard PC printer), item no. 60642
Accessories	
LANCOM Large Scale Monitor	Powerful monitoring system for WLAN, VPN, and LAN infrastructures of mid-sized to large networks, upgradable for up to 1000 monitored devices, for a proactive error management, browser-based remote monitoring, intuitive user interface, graphic floorplans, configurable triggers for alarms and messages, users, roles, and rights management, item no. 62910
LANCOM WLC-4006+ (EU/UK/US)	LANCOM WLAN controller for central management of 6 (opt. up to 30) LANCOM access points and WLAN routers, item no. 62035 (EU), item no. 62036 (UK) and item no. 62037 (US)
LANCOM WLC-4006 (EU/UK)	LANCOM WLAN controller for central management of 6 or 12 LANCOM access points and WLAN routers, item no. 61367 (EU) and item no. 61368 (UK) - only stock devices, article is no longer available
LANCOM WLC-4025+ (EU/UK/US)	LANCOM WLAN controller for central management of 25 (opt. up to 100) LANCOM access points and WLAN routers, item no. 61378, item no. Art.-Nr. 61379 and item no. 61384 (US)
LANCOM WLC-4025 (EU/UK)	LANCOM WLAN controller for central management of 25 (opt. up to 100) LANCOM access points and WLAN routers, item no. 61550 (EU) and item no. 61551 (UK) - only stock devices, article is no longer available
LANCOM WLC-4100 (EU/UK)	LANCOM WLAN controller for central management of 100 (opt. up to 1000) LANCOM access points and WLAN routers, item no. 61369 (EU) and item no. 61377 (UK)
Surge arrestor (LAN cable)	AirLancer Extender SA-LAN surge arrestor (LAN cable), item no. 61213
LANCOM Wall Mount	For simple, theft-proof mounting of LANCOM devices with plastic housings, item no. 61349
Analog modem backup/serial adapter	LANCOM Serial Adapter Kit, item no. 61500

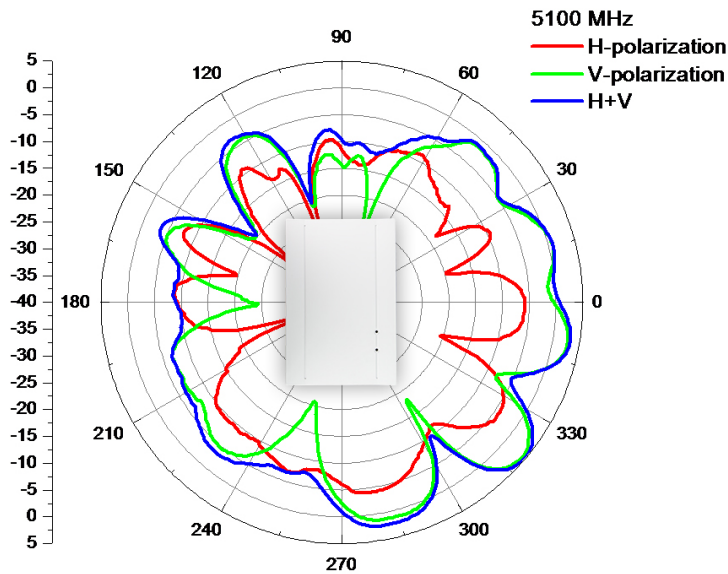
Accessories																																																									
Power over Ethernet Injector	LANCOM GE PoE Power Injector, item no. 61554 (EU) and 61555 (UK)																																																								
Power over Ethernet Switch	LANCOM ES-1108P, 8-port Fast Ethernet switch with 4 PoE ports, item no. 61450 (EU) and 61449 (UK)																																																								
Power over Ethernet Switch	LANCOM ES-2126P+, 24-port Fast Ethernet PoE switch (802.3af, max. 185 W), 2 Gigabit ports, 2 SFP slots, item no. 61468 (EU)																																																								
Item number(s)																																																									
LANCOM L-320agn Wireless	61529																																																								
LANCOM L-320agn Wireless (White, EU)	61564																																																								
LANCOM L-320agn Wireless UK	61530																																																								
LANCOM L-320agn Wireless (White, UK)	61565																																																								
LANCOM L-320agn Wireless 10-piece bulk IL*	61519																																																								
LANCOM L-320agn Wireless 10-piece bulk	61535																																																								
LANCOM L-320agn Wireless White (EU, bulk 10)	61566																																																								
LANCOM L-320agn Wireless 10-piece bulk UK	61547																																																								
LANCOM L-320agn Wireless White (UK, bulk 10)	61567																																																								
*) Notice	There is no 5GHz frequency support available in the IL-Version.																																																								
Antenna Gain																																																									
Overview Antenna Gain in different Frequencies	<table><tr><th colspan="2" rowspan="2">AUT \ Frequency (GHz)</th><th>2.4</th><th>2.45</th><th>2.5</th><th>5.1</th><th>5.3</th><th>5.5</th><th>5.7</th><th>5.9</th></tr><tr><th>2.00</th><th>1.93</th><th>2.04</th><th>4.86</th><th>3.51</th><th>2.87</th><th>3.42</th><th>2.52</th></tr><tr><th rowspan="2">Front side</th><th>H-plane Peak Gain (dBi)</th><td>2.00</td><td>1.93</td><td>2.04</td><td>4.86</td><td>3.51</td><td>2.87</td><td>3.42</td><td>2.52</td></tr><tr><th>H-plane AVG. Gain (dBi)</th><td>-2.29</td><td>-2.47</td><td>-2.88</td><td>-2.24</td><td>-2.69</td><td>-3.08</td><td>-2.48</td><td>-3.14</td></tr><tr><th rowspan="2">Right side</th><th>H-plane Peak Gain (dBi)</th><td>2.31</td><td>2.71</td><td>3.37</td><td>1.48</td><td>0.84</td><td>0.97</td><td>2.80</td><td>2.62</td></tr><tr><th>H-plane AVG. Gain (dBi)</th><td>-3.12</td><td>-3.28</td><td>-2.99</td><td>-2.59</td><td>-3.57</td><td>-3.97</td><td>-3.01</td><td>-3.60</td></tr></table>	AUT \ Frequency (GHz)		2.4	2.45	2.5	5.1	5.3	5.5	5.7	5.9	2.00	1.93	2.04	4.86	3.51	2.87	3.42	2.52	Front side	H-plane Peak Gain (dBi)	2.00	1.93	2.04	4.86	3.51	2.87	3.42	2.52	H-plane AVG. Gain (dBi)	-2.29	-2.47	-2.88	-2.24	-2.69	-3.08	-2.48	-3.14	Right side	H-plane Peak Gain (dBi)	2.31	2.71	3.37	1.48	0.84	0.97	2.80	2.62	H-plane AVG. Gain (dBi)	-3.12	-3.28	-2.99	-2.59	-3.57	-3.97	-3.01	-3.60
AUT \ Frequency (GHz)				2.4	2.45	2.5	5.1	5.3	5.5	5.7	5.9																																														
		2.00	1.93	2.04	4.86	3.51	2.87	3.42	2.52																																																
Front side	H-plane Peak Gain (dBi)	2.00	1.93	2.04	4.86	3.51	2.87	3.42	2.52																																																
	H-plane AVG. Gain (dBi)	-2.29	-2.47	-2.88	-2.24	-2.69	-3.08	-2.48	-3.14																																																
Right side	H-plane Peak Gain (dBi)	2.31	2.71	3.37	1.48	0.84	0.97	2.80	2.62																																																
	H-plane AVG. Gain (dBi)	-3.12	-3.28	-2.99	-2.59	-3.57	-3.97	-3.01	-3.60																																																

Antenna Gain	
2.4 GHz, antenna pattern, front side	
2.4 GHz, antenna pattern, right side	

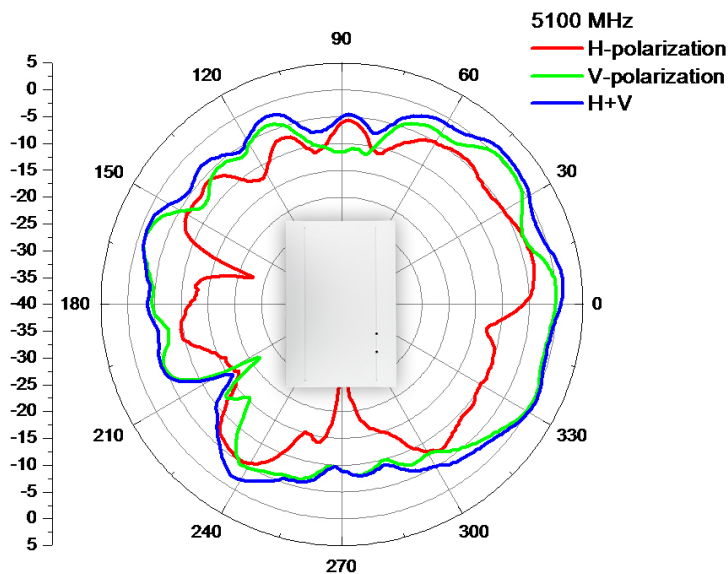
Antenna Gain	
2,45 GHz, antenna pattern, front side	 <p>2450 MHz</p> <ul style="list-style-type: none">H-polarizationV-polarizationH+V
2.45 GHz, antenna pattern, right side	 <p>2450 MHz</p> <ul style="list-style-type: none">H-polarizationV-polarizationH+V

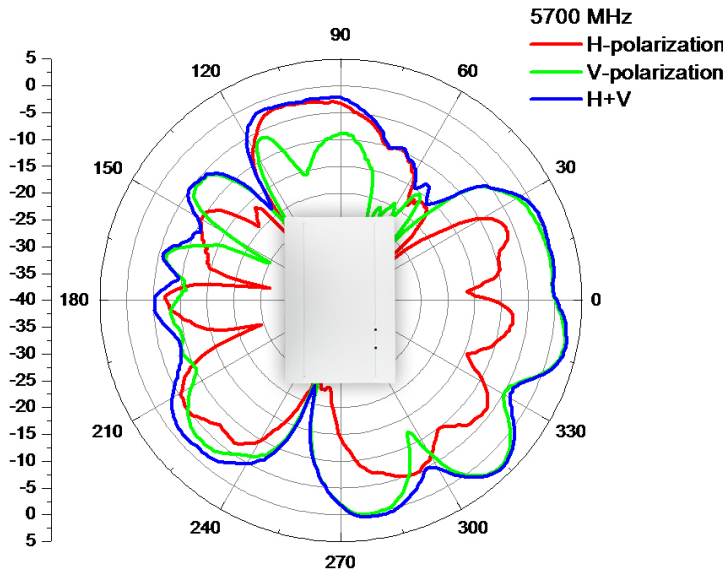
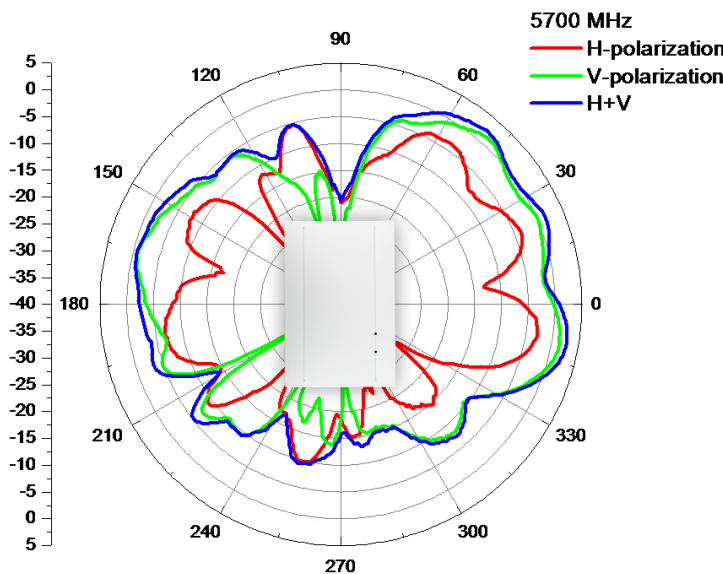
Antenna Gain

5.1 GHz, antenna pattern, front side



5.1 GHz, antenna pattern, right side



Antenna Gain	
5.7 GHz, antenna pattern, front side	
5.7 GHz, antenna pattern, front side	

LANCOM, LANCOM Systems and LCOS are registered trademarks. All other names or descriptions used may be trademarks or registered trademarks of their owners. Subject to change without notice. No liability for technical errors and/or omissions. 9/2013